

Step-By-Step Quick Start Guide To Using Your Generator

1 Remove Generator From Package

2 Add Oil

Oil Type: SAE10W-30 Oil (Must add BEFORE first use)
Oil Capacity: 7.5 fluid oz. Open side panel to add oil. This generator includes Low Oil Shut Off and will not start with low oil. Start out with 7.5 oz, but make sure the **oil does not go over the Lower Level line.** (FIGURE 1)

3 Add Fuel

Unleaded gasoline only octane rating of 87 or higher
Maximum Capacity: 0.55 Gallons (FIGURE 2)

4 Start The Generator

- Use the generator **OUTDOORS** in a **WELL VENTILATED AREA**.
 - **DO NOT CONNECT** electrical devices until **AFTER** the generator is started.
 - Turn Engine Switch to **ON** (FIGURE 3)
 - Turn the fuel tank cap air vent knob clockwise to the "OPEN" position." Turn **FUEL PETCOCK** to **ON** (Figure 4)
 - Adjust the **CHOKE** to **CLOSED TO START** position (Figure 5)
 - Pump the **Primer** button until glass bowl is full (Figure 6)
 - Start the generator with the **Recoil** (Pull) Start. (Figure 7)
 - Once the engine has started, **GRADUALLY** move the choke lever to the "RUN/OPEN" position until the engine levels off. Then let the engine run approximately 5 minutes **BEFORE** adding appliances or tools.
- You can now connect electrical devices.

1 Remove Cover To Add Oil



4 Fuel Petcock To ON



5 Closed To Start Position



6 Pump PRIMER Button



7 Recoil Start



X CO

ITEM # GEN1000I

1,000 Surge / 800 Running Watts

UNLEADED GASOLINE FUEL

GENERATOR SPECIFICATIONS:

- 1.3 HP Engine / 4 Stroke / 5,500 RPM
- Recoil Start
- 0.55 Gallon Fuel Tank
- 7.5 fluid oz. SAE10W-30 Oil
- Low Oil Shut Off
- UL Listed Electrical Outlet
- Engine Shut Off Switch
- Circuit Breaker & Power Outlets
- 1 - 12V D/C Outlet
- 1 - 120V A/C Outlet
- Complies with EPA / CARB emissions
- Run time = 6.3 hours @ 50% load
- Decibel Rating < 56 db @ 0% load
- High Altitude Use: This generator is not recommended for high altitude use 3,000 feet above sea level.
- If you are using a generator at 3,000 feet above sea level, the generator may not function properly because of air flow getting through the carburetor.
- Warranty: 2 YEAR Limited Emissions
- Warranty: 1 YEAR Limited
- **DO NOT** use E85, gas/oil mix, or modify the engine to run on alternate fuels.


OIL IS NOT INCLUDED WITH THIS GENERATOR. IT IS SOLD SEPARATELY.

Read and understand instruction manual before using generator.

ITEM # GEN1000I

1,000 Surge / 800 Running Watts

UNLEADED GASOLINE FUEL

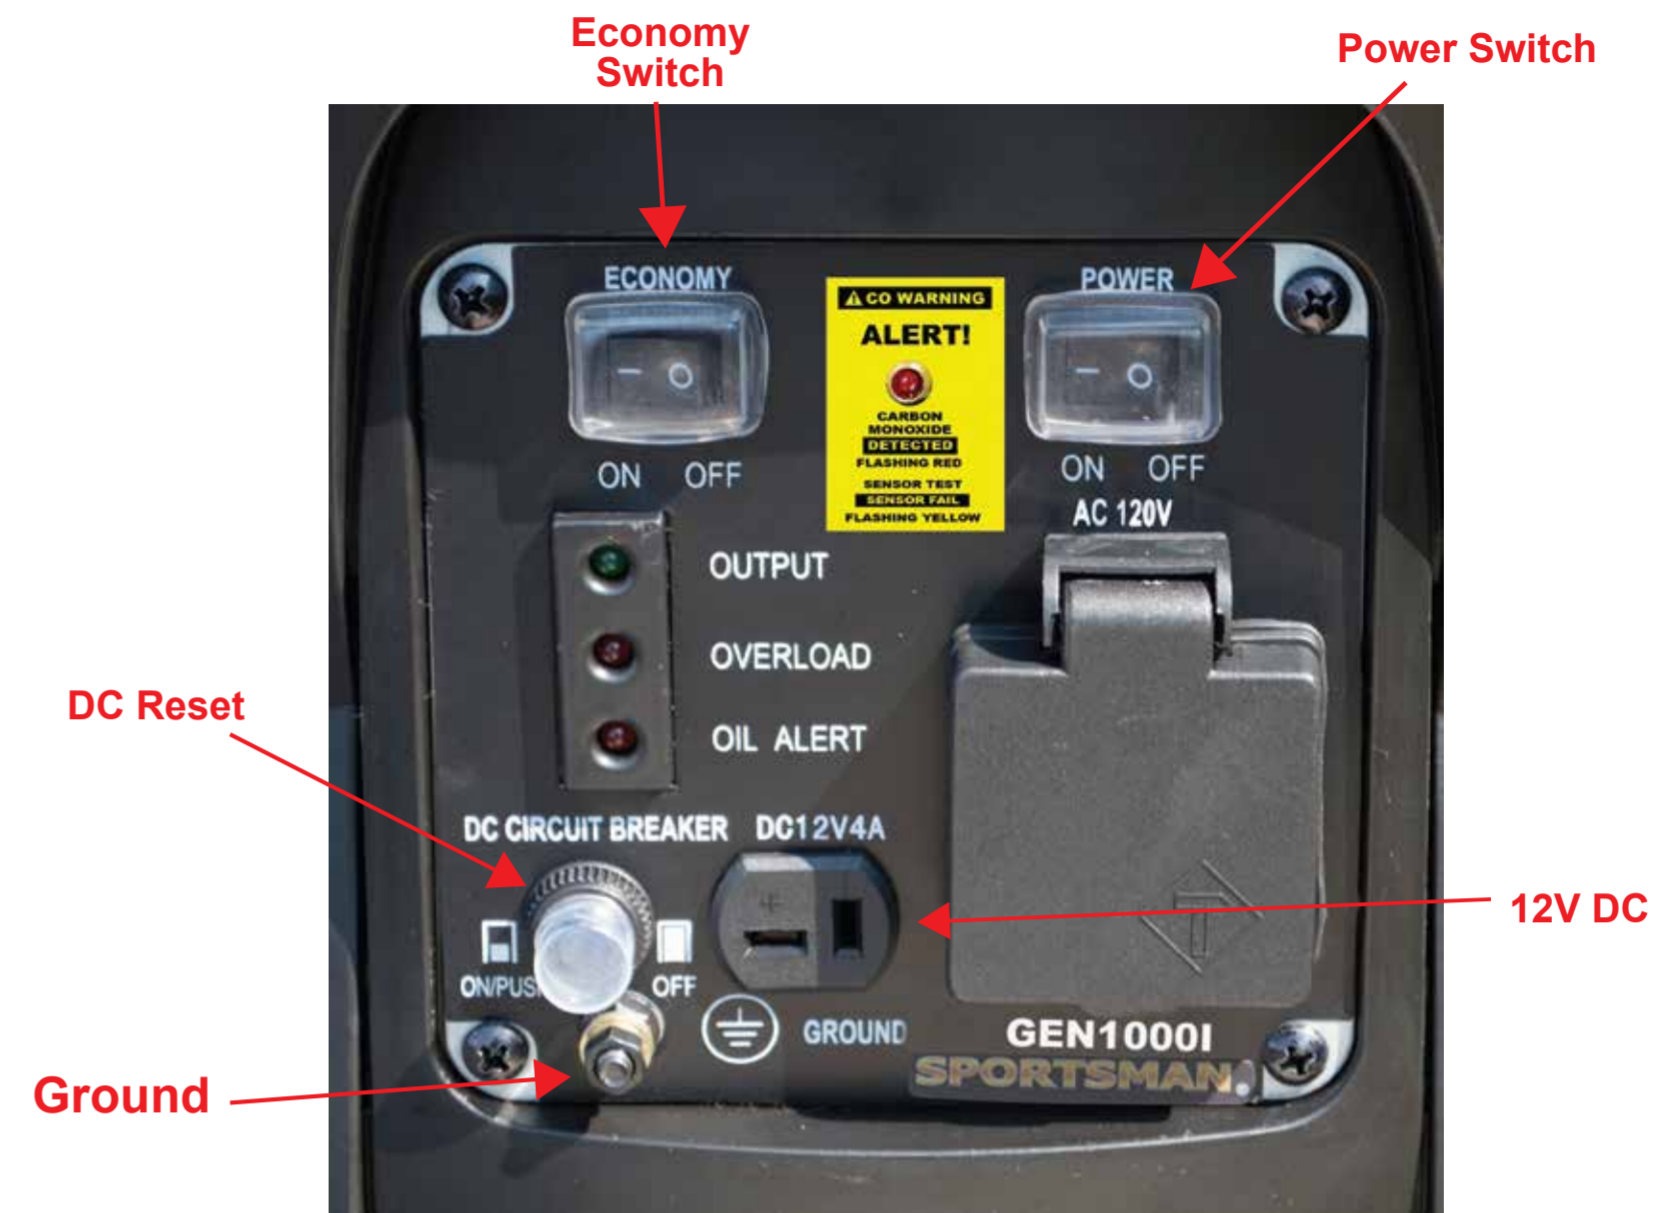

NOTES

DO NOT CONNECT electrical devices until **AFTER** the generator is started.

WARNING

IF THERE IS ANY QUESTION ABOUT A CONDITION BEING SAFE OR UNSAFE, DO NOT OPERATE THIS PRODUCT!

Always follow Warning labels placed on the generator, and read and follow all Warning labels included inside the Product Manual.

WARNING: NEVER use a generator inside a home or a garage, **EVEN IF** the doors and windows are open.

ONLY USE OUTSIDE and far way from windows, doors and vents leading into an enclosed area.

Using a generator indoors can kill you in minutes. The generator produces an exhaust that contains carbon monoxide. This is a poison you cannot see or smell.

Do not attach a chain or rope to secure the generator to a post as this can be difficult to remove in the event of an emergency.

ATTENTION CO WARNING ALERT!

This generator includes a built-in Carbon Monoxide Warning Alert! The generator will automatically shut-off if dangerous levels of Carbon Monoxide is detected.

WARNING Carbon monoxide (also known as CO) can be dangerous for humans and pets. Carbon monoxide poisoning can lead to death in a very short time. It is called "the silent killer" because it is odorless, tasteless and invisible: you may be exposed without knowing it.

NOTE: The indicator will light RED and the engine will shutdown if dangerous Carbon Monoxide levels are detected. The engine will not restart for 5 minutes. If an error in the carbon monoxide system is detected, the indicator will blink YELLOW and the engine will shutdown for five minutes.

READ MANUAL FOR COMPLETE CO WARNING INSTRUCTIONS!

WARNING! IF DANGEROUS CARBON MONOXIDE LEVELS ARE DETECTED, ENGINE WILL SHUTOFF

AUTOMATIC SHUTOFF - YOU MUST:

MOVE GENERATOR TO AN OPEN, OUTDOOR AREA. POINT EXHAUST AWAY. DON'T RUN GENERATOR IN ENCLOSED AREAS (E.G. NOT IN HOUSE OR GARAGE)

The indicator will light RED and the engine will shutdown if dangerous CO levels are detected. The engine will not restart for 5 minutes. If an error in the carbon monoxide system is detected, the indicator will light YELLOW. MOVE TO FRESH AIR AND GET MEDICAL HELP IF SICK, DIZZY OR WEAK.

TOLL-FREE NATIONWIDE HELP LINE! 866-460-9436

**ATTENTION
CO WARNING
ALERT!**

This generator includes a built-in Carbon Monoxide Warning Alert! The generator will automatically shut-off if dangerous levels of Carbon Monoxide is detected.

**Need Help? Call Customer Service!
Monday-Friday 8:00 AM - 4:00 PM Central Time**

SPORTSMAN

TOLL-FREE NATIONWIDE HELP LINE! 866-460-9436

**Need Help? Call Customer Service!
Monday-Friday 8:00 AM - 4:00 PM Central Time**

SPORTSMAN